

# TR-7wb/nw


Welcome to the World of IoT!  
Seamless, Simple yet Sophisticated!



# Temperature & Humidity Data Loggers



wb  
wireless LAN



nw  
wired LAN




## LAN Network

Automatically upload recorded data to the cloud  
Access and manage your data anytime from anywhere  
Have warning reports sent by e-mail



## Bluetooth®

Simply open the app to auto-search for nearby loggers  
Check your data and make all necessary settings  
It has never been easier!

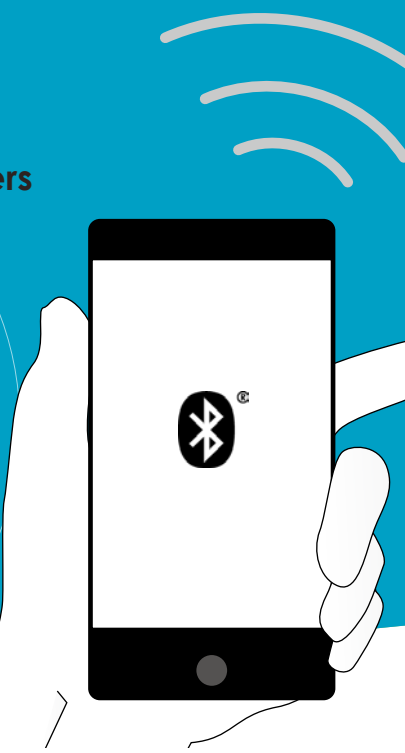

# made for the CLOUD!




Two types to choose from: The all new Wireless LAN Bluetooth® enabled TR-7wb and the dedicated Wired LAN TR-7nw.

Sending and storing data to T&D's cloud service ensures easy access to your important temp/humidity data from anywhere at anytime.

Simple direct USB connection to PC also allows for easy downloading and viewing of data, as well as, total control over logger settings.

Best of all T&D software and cloud service storage is FREE of charge!

Get / Send Settings

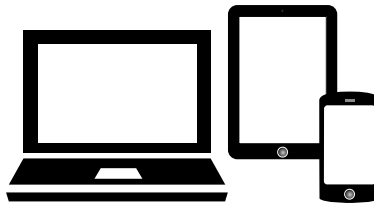

**Your choice: PC,  
Tablet, Smartphone  
Stay Up-to-Date,  
In-the-Know  
And In Charge**


Upload / Download

## PC via USB Connection

Connect via USB for Downloading Data and Settings Management

wb

nw



Temperature



**TR-71wb** Bluetooth®, Wireless LAN, USB



**TR-71nw** Wired LAN, USB



Thermocouple (K, J, T, E, S, R)

**TR-75wb** Bluetooth®, Wireless LAN, USB



Thermocouple (K, J, T, E, S, R)

**TR-75nw** Wired LAN, USB



Humidity - Temperature



**TR-72wb** Bluetooth®, Wireless LAN, USB



**TR-72nw** Wired LAN, USB



High Precision Type

**TR-72wb-S** Bluetooth®, Wireless LAN, USB



High Precision Type

**TR-72nw-S** Wired LAN, USB

		TR-71wb / 71nw	TR-72wb / 72nw		TR-72wb-S / 72nw-S		TR-75wb / 75nw
Measurement Channels		Temperature 2ch	Temperature 1ch Humidity 1ch		Temperature 1ch, Humidity 1ch High Precision Type		Temperature 2ch
Sensor		Thermistor	Thermistor	Polymer Resistance	Thermistor	Polymer Resistance	Thermocouple: Type K, J, T, E, S, R <sup>*1</sup>
Measurement Units		°C, °F	°C, °F	%RH	°C, °F	%RH	°C, °F
Measurement Range	Internal Sensor	-10 to 60°C <sup>*2</sup>	-	-	-	-	-
	External Sensor	-40 to 110°C (Supplied Sensor) -60 to 155°C (Optional Sensor)	0 to 55 °C	10 to 95 %RH	-25 to 70 °C	0 to 99 %RH <sup>*3</sup>	K -199 to 1370 °C    E -199 to 1000 °C J -199 to 1200 °C    S -50 to 1760 °C T -199 to 400 °C    R -50 to 1760 °C
Accuracy		Avg. ± 0.3°C -20 to 80°C Avg. ± 0.5°C -40 to -20°C / 80 to 110°C	±0.5°C	±5 %RH at 25°C, 50%RH	±0.3°C at 10 to 40°C ±0.5°C all other temperatures	±2.5%RH at 15 to 35°C, 30 to 80 %RH	Thermocouple Measurement (Sensor inaccuracies not included) K, J, T, E: ±(0.5°C+0.3% of reading) S, R: ±(1.5°C+0.3% of reading) at 100°C or above Cold Junction Compensation ±0.5°C at 10 to 40°C ±0.8°C other temperatures within the operating environment of the logger
Measurement Resolution		0.1°C	0.1°C	1%RH	0.1°C	0.1%RH	K, J, T, E: 0.1°C S, R: approx. 0.2°C
Responsiveness		Thermal Time Constant: Approx. 75 sec. Response Time (90%): Approx. 190 sec.	Response Time (90%): Approx. 7 min.		Response Time (90%): Approx. 7 min.		-

LCD Display Items	Measurements (fixed or alternating display), Battery Warning Mark, etc.
Logging Capacity	8,000 data sets (One data set consists of readings for all channels in that type of unit)
Recording Interval	Select from 15 choices: 1, 2, 5, 10, 15, 20, 30 sec. or 1, 2, 5, 10, 15, 20, 30, 60 min.
Recording Mode	Endless (Overwrite oldest data when capacity is full) or One Time (Stop recording when capacity is full)
Auto-upload Interval	Select from 15 choices: OFF (No auto-upload), 1, 2, 5, 10, 15, 20, 30 min. or 1, 2, 3, 4, 6, 12, 24 hrs.

Communication Interfaces	TR-7wf Wireless LAN Communication: IEEE 802.11b/g/n Security <sup>*4</sup> : WEP (64bit/128bit), WPA-PSK(TKIP), WPA2-PSK(AES) WPS 2.0: Push Button Configuration Protocol: HTTP <sup>*5</sup> , DHCP, DNS TR-7wf Bluetooth® Communication: Bluetooth 4.2 (Bluetooth low energy) TR-7nw Wired LAN Communication: 100BASE-TX/10BASE-T (RJ45 Connector) Protocol: HTTP <sup>*5</sup> , DHCP, DNS USB Communication: USB 2.0 (Mini-B connector)
--------------------------	--

Power <sup>*6</sup>	Battery: AA Alkaline x 2, AA Ni-MH x 2 External: USB Bus 5V 200mA, AC Adaptor AD-05A2 or AD-05C2, PoE IEEE 802.3af (TR-7nw only)
---------------------	---

Battery Life <sup>*7</sup>	TR-71wb / 72wb: Approx. 10 days to 15 months <sup>*8</sup> TR-71nw / 72nw: Approx. 10 days to 1.5 years <sup>*9</sup>	TR-75wb: Approx. 10 days to 1 year <sup>*8</sup> TR-75nw: Approx. 10 days to 1 year <sup>*9</sup>
----------------------------	--	--

Dimensions	H 58 mm x W 78 mm x D 26 mm
------------	-----------------------------

Weight	Approx. 55g
--------	-------------

Operating Environment	Temperature: -10 to 60°C <sup>*10</sup> Humidity: 90%RH or less (no condensation)
-----------------------	--

Accessories	Temperature Sensor TR-0106 x 2	Temperature-Humidity Sensor THA-3001	High Precision Temperature-Humidity Sensor SHA-3151	-
	AA Alkaline Battery LR6 x 2, Registration Code Label, USB Mini-B Cable US-15C, Manual Set (Warranty Included)			

Software Compatible OS <sup>*11</sup>	TR-7wb/nw for Windows, T&D Graph, T&D Data Server (For PC) Microsoft Windows 8 32 / 64 bit Microsoft Windows 7 32 / 64 bit Microsoft Windows Vista 32 bit (SP1 or later) T&D Thermo (For Mobile Devices) Android OS, iOS (For the compatible versions, please refer to our website.)
---------------------------------------	---

Display Languages <sup>*12</sup>	English
----------------------------------	---------

<sup>\*1</sup>: Compatible wire sizes are as follows. Single Wire : φ 0.32 to φ 0.65 mm (AWG 28-22), Twisted Wire : 0.08 to 0.32 mm<sup>2</sup> (AWG 28-22), φ 0.12 mm or more in diameter, Stripping Length : 9 to 10 mm

<sup>\*2</sup>: When Auto Upload is used frequently, the measurement of the internal sensor may rise by around 0.3°C. When using external power, the data logger itself generates heat and the internal sensor will report a temperature much higher than ambient; we recommend using an external temperature sensor in this case.

<sup>\*3</sup>: When continually used in environments with temperatures above 60°C, accuracy of humidity measurements will decrease over time. Also, humidity cannot be measured at temperatures below -20°C.

<sup>\*4</sup>: If you wish to use the WPS feature, set the security type of the wireless LAN access point to "WPA2-PSK(AES)" or "None".

<sup>\*6</sup>: When using external power, the internal temperature of the logger rises.

<sup>\*7</sup>: Battery life is highly dependant on the Auto-upload interval; at 1 min will give 10 days of usage, and at 12 hours or more will yield the maximum lifetime. Other influential factors include LAN environment, ambient temperature, recording interval, and battery performance. All estimates are based on operations carried out with a new battery and are in no way a guarantee of actual battery life.

<sup>\*8</sup>: Shows the estimated battery life with Bluetooth and Auto-Upload ON. It will be 1.2 times longer with Bluetooth OFF.

<sup>\*9</sup>: Shows the estimated battery life with Auto-Upload ON.

<sup>\*10</sup>: -10 to 45°C when using external power. (TR-7nw only)

<sup>\*11</sup>: For installation, it is necessary to have Administrator (Computer Administrator) rights.

<sup>\*12</sup>: We recommend using an operating system in the same language as the display language. Operation in different languages is not guaranteed.

The specifications listed above are subject to change without notice.

**Temperature Sensors for TR-71wb/ 71nw**

Measurement Range: -40 to 110°C, Sensor

Temperature Durability: -50 to 115 °C,

Accuracy: Avg. ±0.3°C at -20 to 80°C, Avg. ±0.5°C at -40 to -20°C / 80 to 110°C

Materials: ① Thermistor ② TPE Mold ③ TPE Cable ④ M3 Crimp Terminal ( aluminium ) ⑤ ShrinkTube ⑥ Stainless Tube ( SUS304 ) ⑦ Stainless Tube ( SUS316 )


**TR-0106**

TPE Resin-Shielded Sensor

Response Time ( 90% ):

Approx. 190 sec. ( in air )

Waterproof Capacity: None



[Unit: mm]


**TR-0206**

Screw-down Sensor

Response Time ( 90% ):

Approx. 210 sec. ( in air )

Waterproof Capacity: None

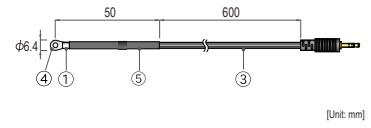

[Unit: mm]


**TR-0306**

Stainless Protection Sensor

Response Time ( 90% ):

Approx. 11 sec. ( in agitated water )

Waterproof Capacity: None

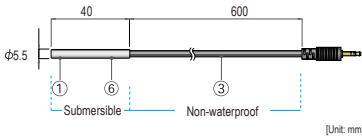

[Unit: mm]


**TR-0406**

Stainless Protection Sensor

Response Time ( 90% ):

Approx. 15 sec. ( in agitated water )

Waterproof Capacity: None

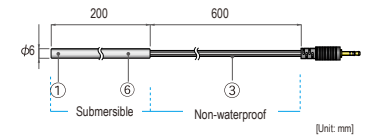

[Unit: mm]


**TR-0506**

Stainless Protection Sensor

Response Time ( 90% ):

Approx. 10 sec. ( in agitated water )

Waterproof Capacity: None



[Unit: mm]


**TR-0706**

Stainless Protection Sensor

Response Time ( 90% ):

Approx. 11 sec. ( in agitated water )

Waterproof Capacity: None

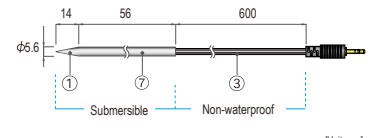

[Unit: mm]

**Temperature Sensors for TR-71wb/71nw (Fluoropolymer Coated Type)**

Measurement Range: -60 to 155°C

Sensor Temperature Durability: -70 to 180°C,

Accuracy: Avg. ±0.5°C at -40 to 80°C, Avg. ±1.0°C at -60 to -40°C / 80 to 100°C,

Avg. ±2.0°C at 100 to 155°C

Materials: ① Thermistor ② Stainless Tube (SUS316) ③ FEP Shrink Tube ④ FEP Cable


**TR-1106**

Fluoropolymer Coated Sensor

Response Time ( 90% ):

Approx. 80 sec. ( in air )

Approx. 7 sec. ( in agitated water )



[Unit: mm]


**TR-1220**

Stainless Protection Sensor

Response Time ( 90% ):

Approx. 150 sec. ( in air )

Approx. 7 sec. ( in agitated water )



[Unit: mm]


**TR-1320**

Stainless Protection Sensor

Response Time ( 90% ):

Approx. 90 sec. ( in air )

Approx. 3 sec. ( in agitated water )



[Unit: mm]

**Temperature-Humidity Sensors for TR-72wb / 72nw**

Materials: ① Temp/Humidity Sensor ② Polypropylene Resin ③ ABS Resin

④ PVC Cable ⑤ Halogen-Free Flame Resistant Sheath Cable

**THA-3001**

Measurement Range :

Temperature: 0 to 55°C

Humidity: 10 to 95%RH


( no condensation\*1 )

Accuracy:

Temperature: ±0.5°C

Humidity: ±5%RH at 25°C and 50%RH

Response Time ( 90% ) : Approx. 7 min.



[Unit: mm]

**THA-3151**

Measurement Range :

Temperature: 0 to 55°C

Humidity: 10 to 95 %RH


( no condensation\*1 )

Accuracy:

Temperature: ±0.5°C

Humidity: ±5%RH at 25°C and 50%RH

Response Time ( 90% ) : Approx. 7 min.

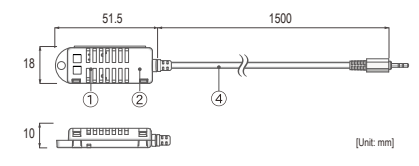

[Unit: mm]

**SHA-3151 : High Precision Type**

Measurement Range :

Temperature: -25 to 70°C,

Humidity: 0 to 99%RH \*1

Accuracy:

Temperature:

±0.3°C at 10 to 40°C,


±0.5°C at all other temperatures\*1

Humidity :

±2.5%RH at 15 to 35°C / 30 to 80%RH

Long Term Stability : ±1%RH / yr, ±0.1°C/yr \*2

Responsiveness : Response Time (90%): Approx. 7 min.

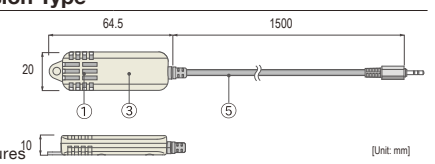

[Unit: mm]

6 \*1: Do not expose to condensation, dampness, corrosive gases or organic solvents.  
\*2: When continually used in environments with temperatures above 60°C, accuracy of humidity measurements will decrease over time. Also, humidity cannot be measured at temperatures below -20°C.


### Wall Attachment

#### TR-07K2

##### Accessories:

- Lock Screw x 2,
- Double-sided adhesive tape

Materials: Polycarbonate



##### Note:


- Cracking may occur if polycarbonate is exposed to strong impact at temperatures of  $-30^{\circ}\text{C}$  or lower.

### Software Set for TR-7wb / 7nw

#### SO-15C1

##### Contents:

- Software CD-ROM,
- USB Communication cable ( US-15C )




##### Note:

- The TR-7wb/nw series software can be downloaded via the internet, but for those who prefer, a CD and USB cable set is available for purchase.

### Communication Cable

#### US-15C

USB Communication Cable



### Sensor Extension Cable


#### TR-1C30

Temperature Durability:

$-25$  to  $60^{\circ}\text{C}$

Waterproof Capacity:

None

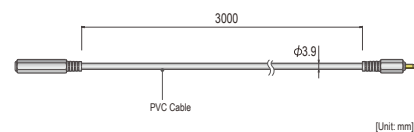


#### TR-5C10

Temperature Durability:

$-25$  to  $60^{\circ}\text{C}$

Waterproof Capacity:

None

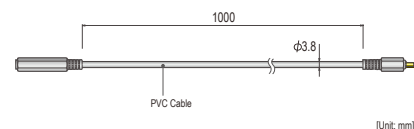

##### Note:

- Temperature sensors can use up to 3 meters of extension cables.
- Temp-Humidity sensors can use up to 9 meters of extension cables.

Compatible Sensors:

Temperature Sensor: TR-1106, TR-1220, TR-1320, TR-0106, TR-0206, TR-0306,  
TR-0406, TR-0506, TR-0706

Temp-Humidity Sensor: THA-3001, THA-3151, SHA-3151

# www.tandd.com

- Colors in the photos in this catalog may be different from real product colors. The specification and designs of the products in this catalog are true as of 02. 2019. Specifications are subject to change without notice. Microsoft and Windows are registered trademarks of Microsoft Corporation USA and other countries.
- Google, Android, and Google Play are trademarks or registered trademarks of Google Inc.
- Apple and App Store are trademarks or registered trademarks of Apple, Inc. in the U.S. and other countries.
- The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by T&D Corporation is under license.
- Company names and product names are trademarks or registered trademarks of each company.



## T&D Corporation

817-1 Shimadachi, Matsumoto, Nagano 390-0852, Japan

Please send your inquiries to:

E-mail : [sales@tandd.com](mailto:sales@tandd.com)

Facsimile : (+81) 263-40-3152

