

# TCTEMP2000

## THERMOCOUPLE TEMPERATURE RECORDER WITH LCD SCREEN




### Features

- Large, backlit LCD
- Internal temperature sensor and one external input which accepts thermocouple types J, K, T, E, R, S, B, N
- Front keypad with lock feature
- High speed download
- Real-time operation
- Min./max. and average statistics
- Programmable start/stop time
- User replaceable battery and external power
- Wall mountable

The TCTemp2000 is a battery powered thermocouple temperature recorder with an LCD display. It has an internal temperature sensor and one external input for J, K, T, E, R, S, B and N type thermocouples.

The 8-button keypad and large LCD provide convenient access to current data and recorder setup. Additionally, memory and battery levels, external power status, and sampling and recording status are shown on the LCD.

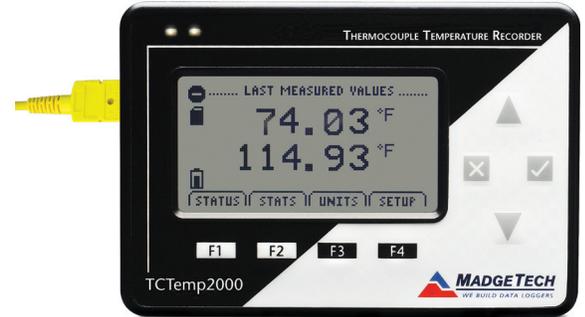

### Benefits

- Simple Setup and Installation
- Minimal Long-Term Maintenance
- Long-Term Field Deployment

Available on-screen data includes: statistics (min, max, average); recording status (start, stop and recording rate); display options (units, text size); and calibration information (date calibrated, date for recalibration). Statistics can be cleared at any time during logging.

### Applications

- HVAC applications
- Oven profiling
- HACCP program implementation
- Process verification and validation
- Warehouse monitoring
- Museum and laboratory monitoring
- Medical/Pharmaceutical
- Environmental studies
- Food storage
- Live cargo transport
- Concrete Curing/Construction

With 131,071 readings, the TCTemp2000 has one of the largest memory capacities of any similar data recorder on the market. The non-volatile memory will retain recorded data, even if AC and battery power are lost.

The TCTemp2000 runs on a 9V battery with a typical battery life of 1 year at a 1 min reading rate with the display off. With continuous LCD and no backlight usage, the average battery life is 30 days. For power savings, both the LCD and backlight have configurable auto-off options. Those wanting to keep the LCD and backlight continuously active need only to connect the unit to an AC power supply, keeping the 9V battery connected as a back up.

## MADGETECH DATA LOGGER SOFTWARE

**Key**

- A** Graph View
- B** Tabular Data View
- C** Statistics
- D** Digital Calibration
- E** Copy to Excel®

Date	Time	Time Zone	Delta	AD009	Thermocouple Temperature
6/26/2012	2:53:37 PM	-0400	-00:00:00		
6/26/2012	2:54:37 PM	-0400	-00:00:00		
6/26/2012	2:55:37 PM	-0400	-00:00:00		
6/26/2012	2:56:37 PM	-0400	-00:00:00		
6/26/2012	2:57:37 PM	-0400	-00:00:00		
6/26/2012	2:58:37 PM	-0400	-00:00:00		
6/26/2012	2:59:37 PM	-0400	-00:00:00		
6/26/2012	3:00:37 PM	-0400	-00:00:00		
6/26/2012	3:01:37 PM	-0400	-00:00:00		
6/26/2012	3:02:37 PM	-0400	-00:00:00		
6/26/2012	3:03:37 PM	-0400	-00:00:00		
6/26/2012	3:04:37 PM	-0400	-00:00:00		
6/26/2012	3:05:37 PM	-0400	-00:00:00		
6/26/2012	3:06:37 PM	-0400	-00:00:00		
6/26/2012	3:07:37 PM	-0400	-00:00:00		
6/26/2012	3:08:37 PM	-0400	-00:00:00		
6/26/2012	3:09:37 PM	-0400	-00:00:00		
6/26/2012	3:10:37 PM	-0400	-00:00:00		
6/26/2012	3:11:37 PM	-0400	-00:00:00		
6/26/2012	3:12:37 PM	-0400	-00:00:00		
6/26/2012	3:13:37 PM	-0400	-00:00:00		
6/26/2012	3:14:37 PM	-0400	-00:00:00		
6/26/2012	3:15:37 PM	-0400	-00:00:00		
6/26/2012	3:16:37 PM	-0400	-00:00:00		
6/26/2012	3:17:37 PM	-0400	-00:00:00		
6/26/2012	3:18:37 PM	-0400	-00:00:00		
6/26/2012	3:19:37 PM	-0400	-00:00:00		
6/26/2012	3:20:37 PM	-0400	-00:00:00		
6/26/2012	3:21:37 PM	-0400	-00:00:00		
6/26/2012	3:22:37 PM	-0400	-00:00:00		
6/26/2012	3:23:37 PM	-0400	-00:00:00		
6/26/2012	3:24:37 PM	-0400	-00:00:00		
6/26/2012	3:25:37 PM	-0400	-00:00:00		
6/26/2012	3:26:37 PM	-0400	-00:00:00		
6/26/2012	3:27:37 PM	-0400	-00:00:00		
6/26/2012	3:28:37 PM	-0400	-00:00:00		
6/26/2012	3:29:37 PM	-0400	-00:00:00		
6/26/2012	3:30:37 PM	-0400	-00:00:00		
6/26/2012	3:31:37 PM	-0400	-00:00:00		
6/26/2012	3:32:37 PM	-0400	-00:00:00		
6/26/2012	3:33:37 PM	-0400	-00:00:00		
6/26/2012	3:34:37 PM	-0400	-00:00:00		
6/26/2012	3:35:37 PM	-0400	-00:00:00		
6/26/2012	3:36:37 PM	-0400	-00:00:00		
6/26/2012	3:37:37 PM	-0400	-00:00:00		
6/26/2012	3:38:37 PM	-0400	-00:00:00		
6/26/2012	3:39:37 PM	-0400	-00:00:00		
6/26/2012	3:40:37 PM	-0400	-00:00:00		
6/26/2012	3:41:37 PM	-0400	-00:00:00		
6/26/2012	3:42:37 PM	-0400	-00:00:00		
6/26/2012	3:43:37 PM	-0400	-00:00:00		
6/26/2012	3:44:37 PM	-0400	-00:00:00		
6/26/2012	3:45:37 PM	-0400	-00:00:00		
6/26/2012	3:46:37 PM	-0400	-00:00:00		
6/26/2012	3:47:37 PM	-0400	-00:00:00		
6/26/2012	3:48:37 PM	-0400	-00:00:00		
6/26/2012	3:49:37 PM	-0400	-00:00:00		
6/26/2012	3:50:37 PM	-0400	-00:00:00		
6/26/2012	3:51:37 PM	-0400	-00:00:00		
6/26/2012	3:52:37 PM	-0400	-00:00:00		
6/26/2012	3:53:37 PM	-0400	-00:00:00		
6/26/2012	3:54:37 PM	-0400	-00:00:00		
6/26/2012	3:55:37 PM	-0400	-00:00:00		
6/26/2012	3:56:37 PM	-0400	-00:00:00		
6/26/2012	3:57:37 PM	-0400	-00:00:00		
6/26/2012	3:58:37 PM	-0400	-00:00:00		
6/26/2012	3:59:37 PM	-0400	-00:00:00		
6/26/2012	4:00:37 PM	-0400	-00:00:00		

- Software Features:**
- Multiple graph overlay
  - Statistics
  - Digital calibration
  - Zoom in/ zoom out
  - Lethality equations (F0, PU)
  - Mean Kinetic Temperature
  - Full time zone support
  - Data annotation
  - Min./Max./Average lines
  - Data table view
  - Automatic report generation
  - Summary view
  - Multilingual

# TCTEMP2000 SPECIFICATIONS\*

<b>Internal Channel</b>			
Temperature Range:	-20 °C to +60 °C		
Temperature Resolution:	0.1 °C		
Calibrated Accuracy:	±0.5 °C (0 °C to +50 °C)		
<b>Thermocouple Channel</b>			
Thermocouple Types:	J, K, T, E, R, S, B, N		
Thermocouple Connection:	Female subminiature (SMP), fixed screw terminal, or pluggable screw terminal		
Cold Junction Compensation:	Automatic, based on internal channel		
Maximum Thermocouple Resistance:	1000 Ω, <100 Ω recommended		
<b>Thermocouple</b>	<b>Range (°C)</b>	<b>Resolution</b>	<b>Accuracy</b>
J	-210 to +760	0.1 °C	±0.5 °C
K	-270 to +1370	0.1 °C	±0.5 °C
T	-270 to +400	0.1 °C	±0.5 °C
E	-270 to +980	0.1 °C	±0.5 °C
R	-50 to +1760	0.5 °C	±2.0 °C
S	-50 to +1760	0.5 °C	±2.0 °C
B	+50 to +1820	0.5 °C	±2.0 °C
N	-270 to +1300	0.1 °C	±0.5 °C
<b>DOT-MATRIX LCD</b>			
Dimensions:	2.5 in x 1.375 in (63 mm x 35 mm)		
Text:	Configurable channel text size		
Indicators:	Power, status, memory		
Backlight:	Configurable w/auto shut-off and contrast adjustment		

<b>Start/Stop Time:</b>	Software programmable start time and date, up to six months in advance; programmable stop time
<b>Memory:</b>	131,071 readings per channel; 262,143 total readings; software configurable memory wrap
<b>Reading Rate:</b>	1 reading every 2 seconds up to 1 reading every 24 hours
<b>Calibration:</b>	Digital calibration through software
<b>Calibration Date:</b>	Automatically recorded within device
<b>Battery Type:</b>	9V lithium battery included, <b>user replaceable</b> ; optional AC adapter
<b>Battery Life:</b>	1 year battery life at 1 min reading rate with display off. 30 days typical with continuous LCD and no backlight usage
<b>Data Format:</b>	Date and time stamped °C, °F, K, °R
<b>Time Accuracy:</b>	±1 minute/month (at 20 °C to 30 °C)
<b>Computer Interface:</b>	USB (interface cable required); 115,200 baud
<b>Software:</b>	XP SP3/Vista/Windows 7/Windows 8
<b>Operating Environment:</b>	-20 °C to +60 °C, 0 %RH to 95 %RH non-condensing
<b>Dimensions:</b>	4.8 in x 3.3 in x 1.25 in (122 mm x 84 mm x 32 mm)
<b>Weight:</b>	16 oz (440 g)
<b>Enclosure:</b>	Black anodized aluminum
<b>Approvals:</b>	CE

**BATTERY WARNING: FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT SHORT CIRCUIT, CHARGE, FORCE OVER DISCHARGE, CRUSH, PENETRATE, OR INCINERATE. BATTERY MAY LEAK OR EXPLODE IF HEATED ABOVE 80 °C (176 °F).**

\*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

## ORDERING INFORMATION

MODEL	DESCRIPTION
TCTemp2000	Thermocouple temperature recorder w/ LCD
IFC200	Software, manual and USB interface cable
U9VL-J	Replacement battery for TCTemp2000
Calibration Certificate	Calibration Certificate available for data logger

For Quantity Discounts call 603-456-2011 or email [sales@madgetech.com](mailto:sales@madgetech.com)

**ASK ABOUT OUR OTHER DATA LOGGERS**

- Temperature
- Humidity
- Pressure
- pH
- Level
- Shock
- LCD Display
- Pulse/Event/State
- Current
- Voltage
- Wireless
- Intrinsically Safe
- Spectral Vibration
- Motion